



2026

Architectural lighting
shaped by material,
atmosphere and precision.



SPECIFICATION CATALOG — 2026 EDITION — EN

Qavun® is a brand of Erel Concept · Catalog concept by Qavun Limited
© 2026 Qavun Limited. All rights reserved

AVATAR — CORD PENDANT

BRAND MANIFESTO

EVERYONE DESERVES PRODUCTS THAT HAVE STORIES

QAVUN® — ARCHITECTURAL COLLECTION 2026

We build sustainability into every project. We take the best that exists and improve it. We push the boundaries of uniqueness with story-added products.

A luminaire is a small piece of architecture. Before it is a source of light it is a housing, an optic, a finish — decisions that must hold up to daily use and to a designer's eye. We make those decisions slowly, and we make them visible.

This catalog is written for the people who specify: architects, interior designers and lighting designers. Every product page carries the complete data needed to put a Qavun luminaire into a schedule.

Three decades of light

03

HERITAGE

Qavun® is a brand of Erel Concept, designing and engineering architectural luminaires since 1996. More than twenty-five years of fixtures for hotels, residences and public space inform every housing, driver and optic we specify today.

DESIGN PHILOSOPHY

We take the best that exists and improve it. Forms are reduced until only the light remains — quiet geometries, warm metals, optics that flatter material and skin. The luminaire recedes; the room advances.

SUSTAINABILITY

We build sustainability into every project. Replaceable LED modules and drivers, aluminium housings with recycled content and solvent-free finishes extend service life and close the loop at end of use.

Index

04

BRAND MANIFESTO	02	04 OUTDOOR	23
01 PENDANT · DECORATIVE	05	PROJECT REFERENCES	25
02 WALL	09	PRODUCT SELECTOR	26
03 CEILING · SURFACE	17	TECHNICAL APPENDIX	27

PENDANT

Avatar Light · 07
Metal Pendant Light · 08

WALL

IDA Wall Light t · 11 Stone Wall Light · 12
Metal Wall Light · 13 Stone Reading Light · 14
Glass Wall Light · 15 Metal Ring Light · 16

CEILING · SURFACE

Hexagon Spot Light · 18 Stone Dual Spot Light · 19
Star Spot Light · 20 Metal Ceiling Light · 21
Glass Ceiling Light · 22

OUTDOOR

Stone Outdoor Bollard · 24

01

PENDANT · DECORATIVE

Avatar Light — cord pendant · 07

Metal Pendant Light — ring pendant · 08

SERIES 01 — PENDANT

Avatar

CORD

Avatar joins the Qavun cord family as a quiet counterpoint to the room it lights. A fabric-textured diffuser disc rests on a slim tapered stem, folding warm light downward while the luminaire itself recedes. Its restrained geometry and finish palette make it equally at home in residential and hospitality interiors — hotels, restaurants and public areas.

LED

10W

IP20

3000/4000K

FINISHES



Recessed

Surface

RECESSED AND SURFACE CANOPIES



AVATAR LIGHT — SANDY BLACK


AVATAR SERIES · CORD PENDANT

Avatar Light


- Fabric-textured diffuser disc on a slim tapered stem
- Direct, glare-controlled warm light with honeycomb louvre
- Recessed or surface canopy; field-adjustable suspension

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
10W	36V	250mA	20	≥90	3000/4000K	110°	850lm	<11

DIMENSIONS — MM

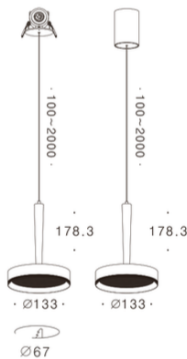

LIGHT DISTRIBUTION — CD/KLM



FINISHES

- SANDY WHITE
- SANDY BLACK
- MATTE SILVER
- MATTE BRASS
- MATTE BRONZE

PENDANT HOTEL · RESIDENTIAL · RESTAURANT



METAL PENDANT LIGHT — SANDY BLACK · Ø 400


PENDANT SERIES · RING PENDANT

Metal Pendant Light


- Asymmetric ring geometry on an offset stem
- Up-down light and downlight versions
- Diameter options Ø 400 / Ø 600

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
6W+14W	36V	500mA	20	≥90	3000/4000K	—	1900lm	—

DIMENSIONS — MM



LIGHT DISTRIBUTION — CD/KLM

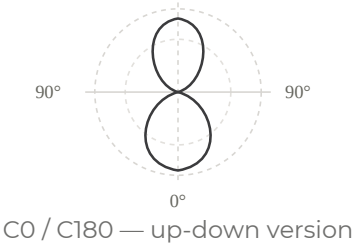

FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
COFFEE
- 
MATTE
BRASS

PENDANT HOTEL · RESIDENTIAL · RESTAURANT

02

WALL

IDA Wall Light · 11 Stone Wall Light · 12

Metal Wall Light · 13 Stone Reading Light · 14

Glass Wall Light · 15 Metal Ring Light · 16

SERIES 02 — WALL

IDA

WALL

IDA is a sculpted uplight cube that washes the wall above it in soft, warm light. Interchangeable optics from 15° to 60° let one body serve stair, corridor and bedside alike — in every Qavun finish, from Sandy White to Matte Bronze.

LED

8W

IP20

15–60°





IDA WALL LIGHT — SANDY BLACK

IDA SERIES · WALL UPLIGHT

IDA Wall Light


- Sculpted uplight cube with a soft, sweeping wash
- Interchangeable beam optics — 15° / 24° / 36° / 60°
- Stairs, corridors and bedside walls

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
8W	36V	200mA	20	≥90	3000/4000K	15-60°	640lm	<10

DIMENSIONS — MM




LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
BRONZE

WALL HOTEL · RESIDENTIAL

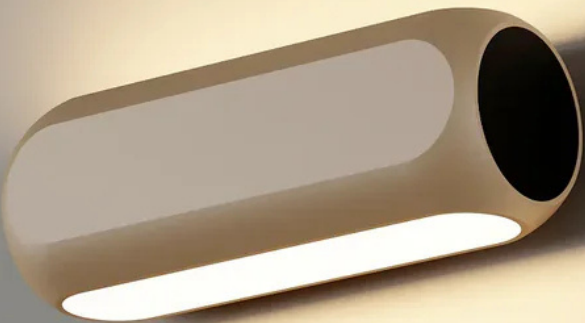

STONE WALL LIGHT — MATTE BRASS


WALL SERIES · SCONCE

Stone Wall Light


- Pill-profile sconce with a precise down wash
- Compact footprint for corridors and bedside walls

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
5.5W	36V	150mA	20	≥90	3000/4000K	60°	420lm	<13

DIMENSIONS — MM




LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
BRONZE

WALL HOTEL · RESIDENTIAL · RESTAURANT

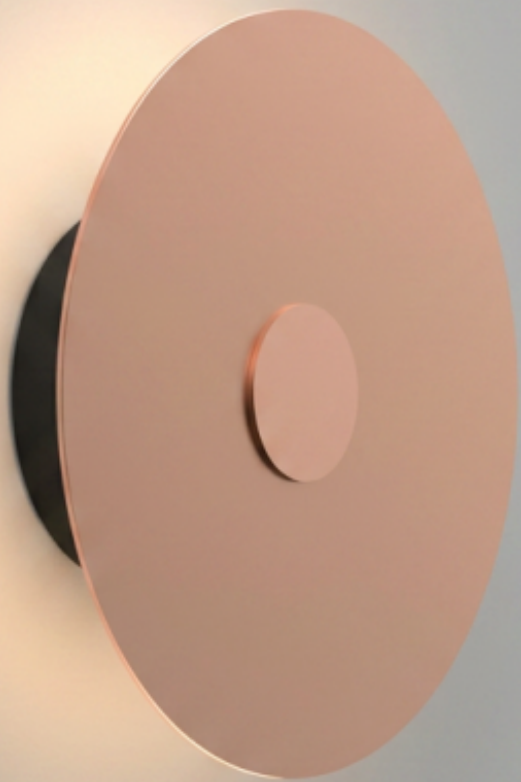

METAL WALL LIGHT — MATTE BRONZE

AURA SERIES · GLOWING DISC

Metal Wall Light


- Glowing disc — indirect, soft halo light
- Two diameter sizes — Ø 300 / Ø 450
- Flush wall mounting; no visible fixings

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
6W	36V	150mA	20	≥90	3000/4000/6000K	120°	520lm	—
10W	36V	250mA	20	≥90	3000/4000/6000K	120°	880lm	—

DIMENSIONS — MM



LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
COFFEE

WALL HOTEL · RESIDENTIAL · RESTAURANT



STONE READING LIGHT — MATTE BRASS


WALL SERIES · READING LIGHT

Stone Reading Light


- Fold-down wall reading light
- Focused beam switches on with the fold movement
- Hotel and residential bedside

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
5W	24V	200mA	20	≥90	3000K	24°	350lm	<10

DIMENSIONS — MM




LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
BRONZE

WALL HOTEL · RESIDENTIAL

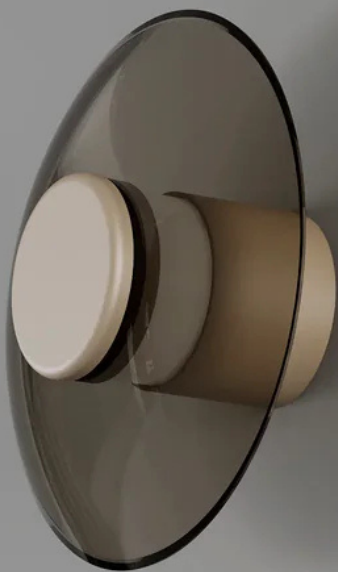

GLASS WALL LIGHT — MATTE COFFEE

WALL SERIES · GLASS

Glass Wall Light


- Halo-backlit glass disc
- Layered glass trim floats the light off the wall

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
9W	36V	250mA	20	≥90	3000/4000K	120°	760lm	—

DIMENSIONS — MM



LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
COFFEE

WALL HOTEL · RESIDENTIAL · RESTAURANT



METAL RING LIGHT — SANDY BLACK


WALL SERIES · RING

Metal Ring Light


- Minimalist ring inspired by the steering wheel
- Mounts in any orientation to suit individual preferences
- Indirect soft light for living room, bedroom and hallway
- Two diameter sizes available

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
11W	36V	300mA	20	≥90	3000/4000K	—	900lm	—

DIMENSIONS — MM



LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
COFFEE
- 
MATTE
BRASS

WALL HOTEL · RESIDENTIAL

03

CEILING · SURFACE

Hexagon Spot Light · 18 Stone Dual Spot Light · 19
Star Spot Light · 20 Metal Ceiling Light · 21
Glass Ceiling Light · 22



HEXAGON SPOT LIGHT — MATTE BRASS


SURFACE SERIES · HEXAGONAL DOWNLIGHT

Hexagon Spot Light


- Hexagonal surface-mounted downlight
- Clusters into honeycomb arrays

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
4W	24V	150mA	20	≥90	3000/4000K	36°	320lm	<13

DIMENSIONS — MM



LIGHT DISTRIBUTION —
CD/KLM



FINISHES

- 

SANDY
WHITE
- 

SANDY
BLACK
- 

MATTE
SILVER
- 

MATTE
COFFEE
- 

MATTE
BRASS

 SURFACE RESIDENTIAL · RESTAURANT · OFFICE



STONE DUAL SPOT LIGHT — MATTE BRASS


SPOT SERIES · DOUBLE SPOT

Stone Dual Spot Light


- Twin pivoting ball spots on a shared base
- Independent aiming — wall wash and accent from one point

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
2×5.5W	36V	300mA	20	≥90	3000/4000K	24°	2×420lm	<16

DIMENSIONS — MM



LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
BRONZE

 SURFACE HOTEL · RESIDENTIAL · OFFICE



STAR SPOT LIGHT — SANDY BLACK

STAR SERIES · SURFACE CYLINDER

Star Spot Light


- Surface-mounted cylinder in the Star family
- 36° general-purpose beam
- IP54 — bathrooms and covered exteriors

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
12W	36V	250mA	54	≥90	3000/4000K	36°	1150lm	<15

DIMENSIONS — MM




LIGHT DISTRIBUTION — CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
BRONZE

 SURFACE HOTEL · RESIDENTIAL · OFFICE

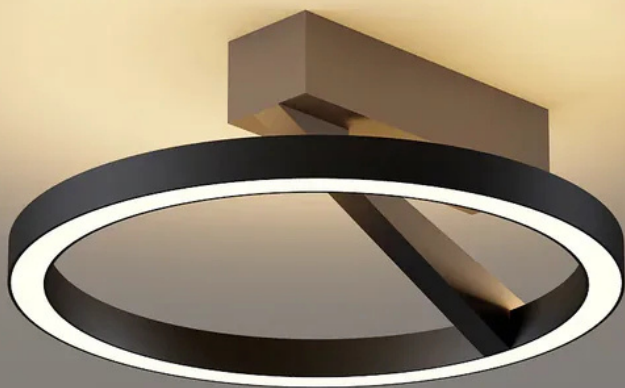

METAL CEILING LIGHT — MATTE SILVER


CEILING SERIES · RING

Metal Ceiling Light


- Combined uplight and downlight in one semi-flush ring
- Living room, bedroom, hallway and balcony

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
5W+12W	36V	450mA	20	≥90	3000/4000K	110°	1350lm	—

DIMENSIONS — MM



LIGHT DISTRIBUTION —
CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
COFFEE
- 
MATTE
BRASS

 SURFACE HOTEL · RESIDENTIAL




CEILING SERIES · GLASS

Glass Ceiling Light


- Surface-mounted downlight with a layered glass trim
- Warm halo spill softens the ceiling plane

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
21W	42V	500mA	20	≥90	3000/4000K	60°	1800lm	<19

DIMENSIONS — MM



LIGHT DISTRIBUTION —
CD/KLM



FINISHES

- 
SANDY
WHITE
- 
SANDY
BLACK
- 
MATTE
SILVER
- 
MATTE
BRASS
- 
MATTE
COFFEE


☐ SURFACE HOTEL · RESIDENTIAL · RESTAURANT

04

OUTDOOR

Stone Outdoor Bollard — IP54 · 24

STONE OUTDOOR BOLLARD — SANDY BLACK

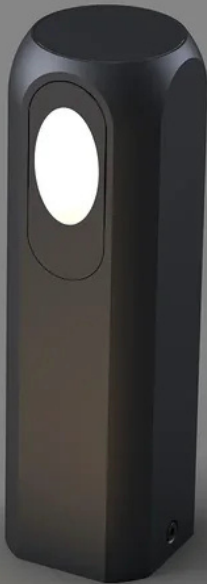


OUTDOOR SERIES · BOLLARD

Stone Outdoor Bollard


- Path bollard with a warm oval aperture
- IP54 — gardens, terraces and approach paths
- Anchor kit and surface base included

P	V	I	IP	CRI	CCT	Beam	Flux	UGR
7W	24V	300mA	54	≥80	3000K	—	480lm	—

DIMENSIONS — MM



LIGHT DISTRIBUTION —
CD/KLM



FINISHES

- SANDY
BLACK
- MATTE
BRONZE

⌋ BOLLARD HOTEL · RESIDENTIAL · LANDSCAPE

Selected projects



Arca Konakları

Location İncek, Ankara

Developer Aslan Yapı · Caba Grup

Scope 42 private residences — residential lighting



Vien Oran

Location Oran, Çankaya — Ankara

Developer Vien Grup · Bayraktar İnşaat

Scope 128 residences, three blocks — residential lighting



Tona Residence

Location Alacaatlı, Çankaya — Ankara

Developer Tona Yapı


Scope 112 residences, 26 retail units — mixed-use lighting

Product selector

PRODUCT	TYPE	MOUNTING	P	FLUX	CCT	BEAM	IP	FINISHES	PAGE
Avatar Light	Cord pendant	Pendant	10W	850lm	3000/4000K	110°	20	5	07
Metal Pendant Light	Ring pendant	Pendant	6W+14W	1900lm	3000/4000K	—	20	5	08
IDA Wall Light	Wall uplight	Wall	8W	640lm	3000K	15–60°	20	5	11
Stone Wall Light	Sconce	Wall	5.5W	420lm	3000/4000K	60°	20	5	12
Metal Wall Light	Glowing disc	Wall	6W / 10W	520–880lm	3000/4000/6000K	120°	20	5	13
Stone Reading Light	Reading light	Wall	5W	350lm	3000K	24°	20	5	14
Glass Wall Light	Glass wall	Wall	9W	760lm	3000/4000K	120°	20	5	15
Metal Ring Light	Wall ring	Wall	11W	900lm	3000/4000K	—	20	5	16
Hexagon Spot Light	Hexagonal downlight	Surface	4W	320lm	3000/4000K	36°	20	5	18
Stone Dual Spot Light	Double spot	Surface	11W	2×420lm	3000/4000K	24°	20	5	19
Star Spot Light	Surface cylinder	Surface	12W	1150lm	3000/4000K	36°	54	5	20
Metal Ceiling Light	Ceiling ring	Surface	5W+12W	1350lm	3000/4000K	110°	20	5	21
Glass Ceiling Light	Surface glass	Surface	21W	1800lm	3000/4000K	60°	20	5	22
Stone Outdoor Bollard	Bollard	Bollard	7W	480lm	3000K	—	54	2	24

Colour temperature & glare

CCT — CORRELATED COLOUR TEMPERATURE

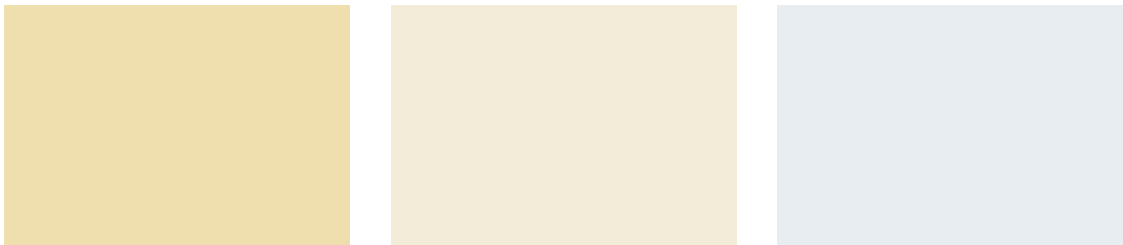

3000K	4000K	6000K
Warm white. Hospitality, residential, anywhere material and skin should read warm.	Neutral white. Offices, retail and task areas where colour judgement matters.	Cool white. Selected wall products only, on request.

All Qavun LED modules are specified at CRI ≥90 with 3-step MacAdam binning; CCT is fixed at order.

UGR — UNIFIED GLARE RATING

UGR describes the likelihood of discomfort glare from a luminaire in a given room; lower is better. Values in this catalog are computed for a 4H × 8H reference room, 0.7 / 0.5 / 0.2 reflectances.

UGR < 10	Bedrooms, suites, reading in the field of view
UGR ≤ 13	Galleries, lounges, prolonged dwell
UGR ≤ 16	Restaurants, corridors, circulation
UGR ≤ 19	General office and workplace lighting (EN 12464-1)

Ingress protection & dimming

IP RATINGS IN THIS CATALOG

IP20	Dry interior spaces
IP44	Splash-protected
IP54	Dust- and splash-protected
IP65	water-proof

DRIVERS & DIMMING COMPATIBILITY

DALI-2	Standard option on all 36V constant-current drivers; addressable, for hospitality and office control systems
TRIAC	Trailing-edge phase dimming for retrofit and residential 230V circuits; verify dimmer model at order
0–10V	Analogue dimming for BMS integration; 1% smooth range on Qavun reference drivers

Dim-to-warm (3000K → 1800K) modules are available for the Avatar and Aura families on request. Specify the dimming protocol with the order code; drivers ship pre-configured.

